

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
RWY 04/22	Grooved Asphalt	69/F/D/W/T
Terminal Stands		
Stands 1,2,9,10	Concrete	29/R/D/W/T
Stands 3-8	Concrete	48/R/D/W/T
Stand 21	Concrete	30/R/D/W/T
Stand 24	Concrete	39/R/D/W/T
Victoria Apron	Concrete	30/R/D/W/T
Taxiway A	Asphalt	50/F/D/W/T

VAR 2.0°W - 2022
N
Annual Rate
of Change 0.22°E




GUND (Geoid Undulation) =

The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	459 (444)
HEIGHTS IN FEET ABOVE AD	

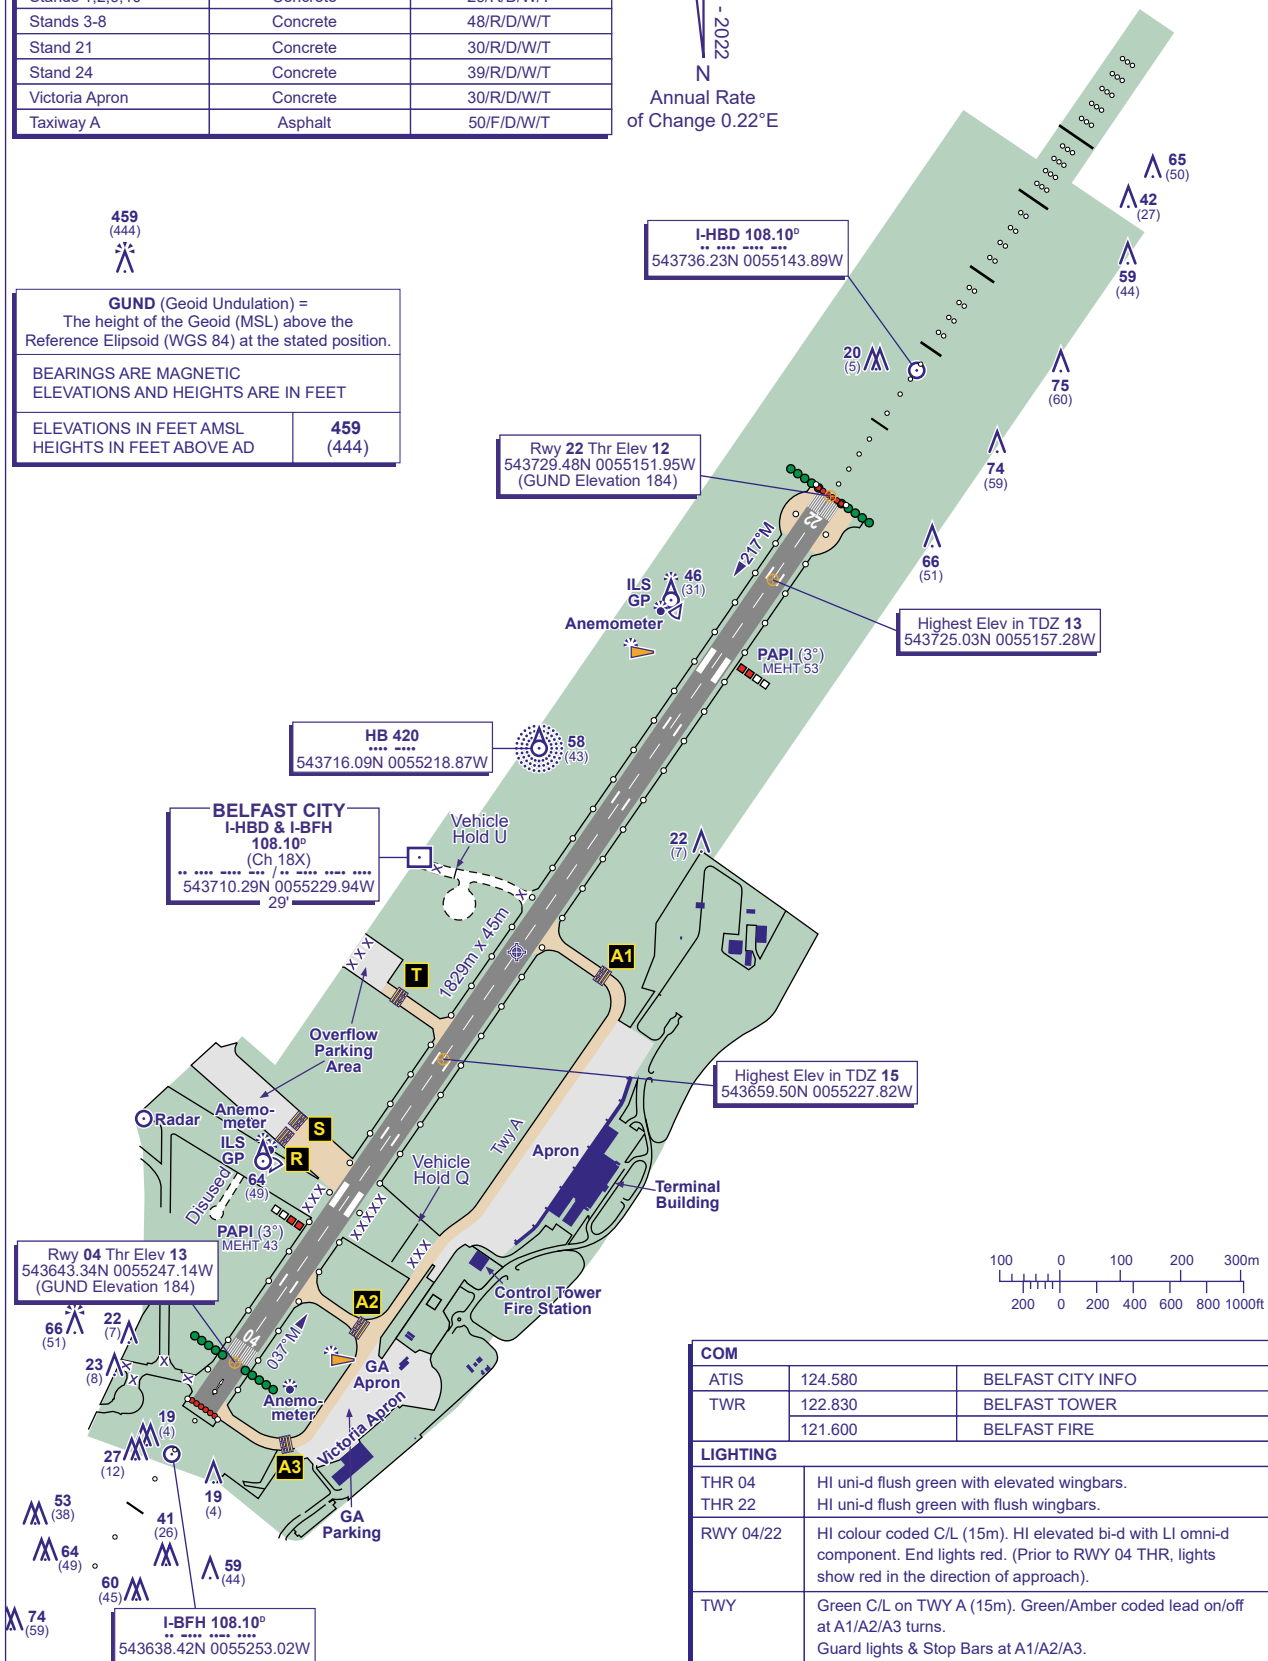

COM		
ATIS	124.580	BELFAST CITY INFO
TWR	122.830	BELFAST TOWER
	121.600	BELFAST FIRE
LIGHTING		
THR 04	HI uni-d flush green with elevated wingbars.	
THR 22	HI uni-d flush green with flush wingbars.	
RWY 04/22	HI colour coded C/L (15m). HI elevated bi-d with LI omni-d component. End lights red. (Prior to RWY 04 THR, lights show red in the direction of approach).	
TWY	Green C/L on TWY A (15m). Green/Amber coded lead on/off at A1/A2/A3 turns. Guard lights & Stop Bars at A1/A2/A3.	

CHANGE (2/24): OBSTACLES. ANEMOMETER. RUNWAY MARKINGS.