



LIVERPOOL
EGG

AERO INFO DATE 25 APR 25

<p>GUND (Geoid Undulation) = The height of the geoid (MSL) above the reference ellipsoid (WGS 84) at the stated position.</p>	
BEARINGS ARE MAGNETIC ELEVATIONS ARE IN FEET	196 (115)
ELEVATIONS IN FEET AMSL HEIGHTS IN FEET ABOVE AD	



RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
RUNWAY / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 09/27	Grooved Asphalt	771F/CWIT	-
Main Apron	Concrete	921R/BWIT	-
TWYs A, C, D, E, F, G, L	Asphalt	771F/CWIT	-
Link K	Asphalt	Max. Weight 5700kg	-

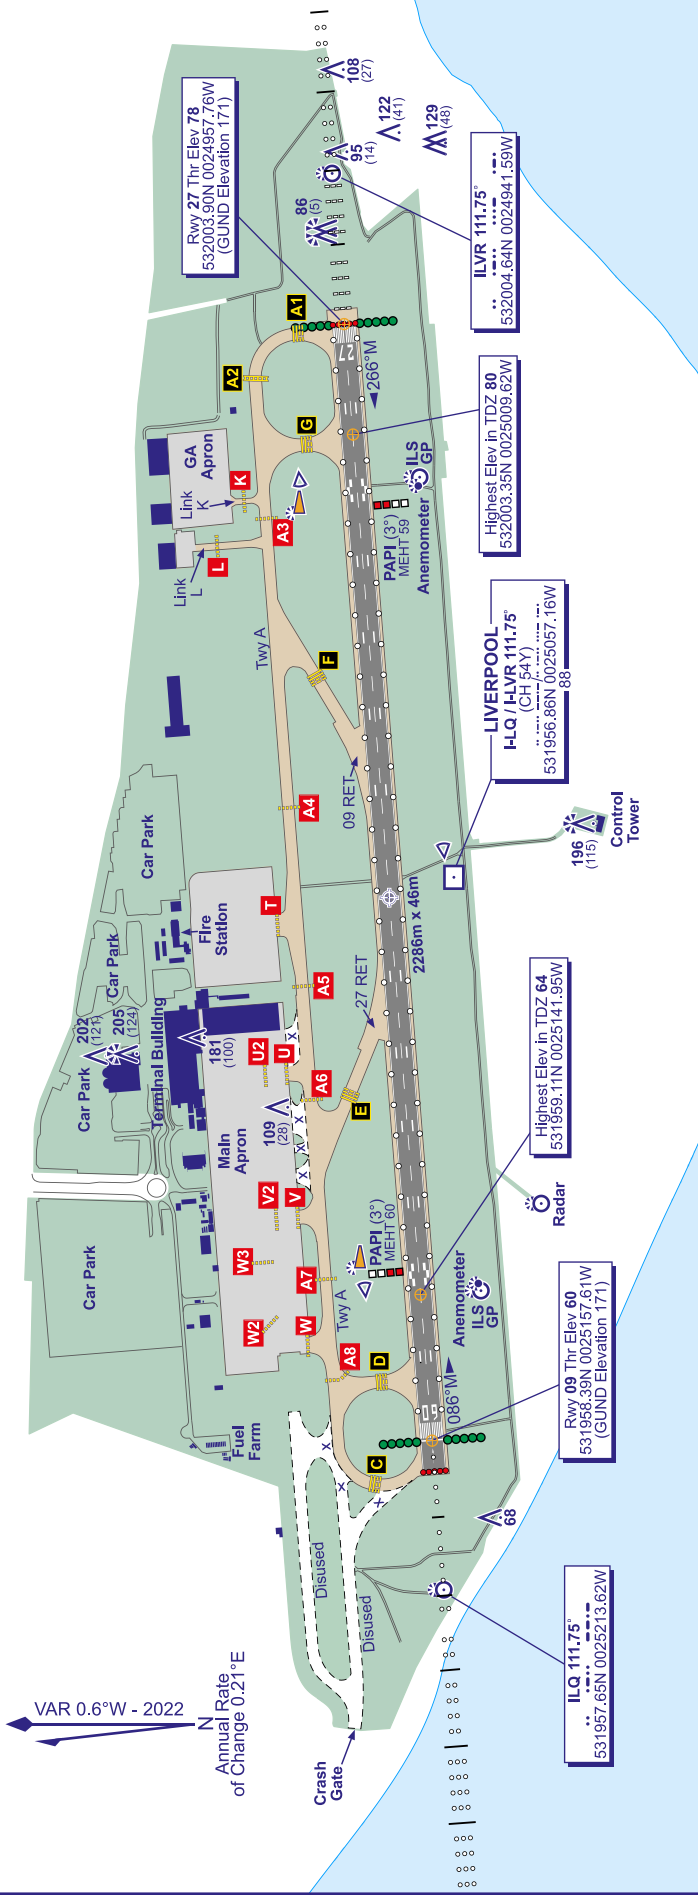

COM		
ATIS	124.330	LIVERPOOL INFORMATION
TWR	126.355	LIVERPOOL TOWER
	121.955	LIVERPOOL GROUND
	121.600	LIVERPOOL FIRE
LIGHTING		
APCH 09	HI 914 m coded C/L with 5 Bar.	
APCH 27	HI 914 m coded C/L with 5 Bar. Supplementary Inner 300 m.	
THR 09/27	HI green with green W bars.	
RWY 09/27	HI bi-d edge with LI omni-d component. HI bi-d colour coded C/L.	
	HI red end lights. RWY 27: TDZ HI 915 m.	
TWY	HI green bi-d C/L TWY A, C, D, E, F, G, K, T, U, V & W.	
	HI omni-d blue edge from Hold L to TWY A.	

CHANGE (7/25): ANEMOMETERS.