


**GUND** (Geoid Undulation) =  
The height of the Geoid (MSL) above the  
Reference Ellipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC  
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	<b>181</b> (116)
HEIGHTS IN FEET ABOVE AD	

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	PCN	ELEVATION
RWY 12/30	Concrete/Asphalt	90/R/C/W/T	-
RWY 02/20	Asphalt	60/F/C/X/U	-
Aprons A & B	Concrete/Asphalt	100/R/C/W/T	30 ft amsl
Aprons C, F & H	Concrete/Asphalt	50/R/A/X/U	-
Aprons G	Concrete/Asphalt	30/R/B/X/U	-
TWYs R & J	Concrete/Asphalt	65/R/C/W/T	-
TWY S	Asphalt	60/F/B/X/U	-

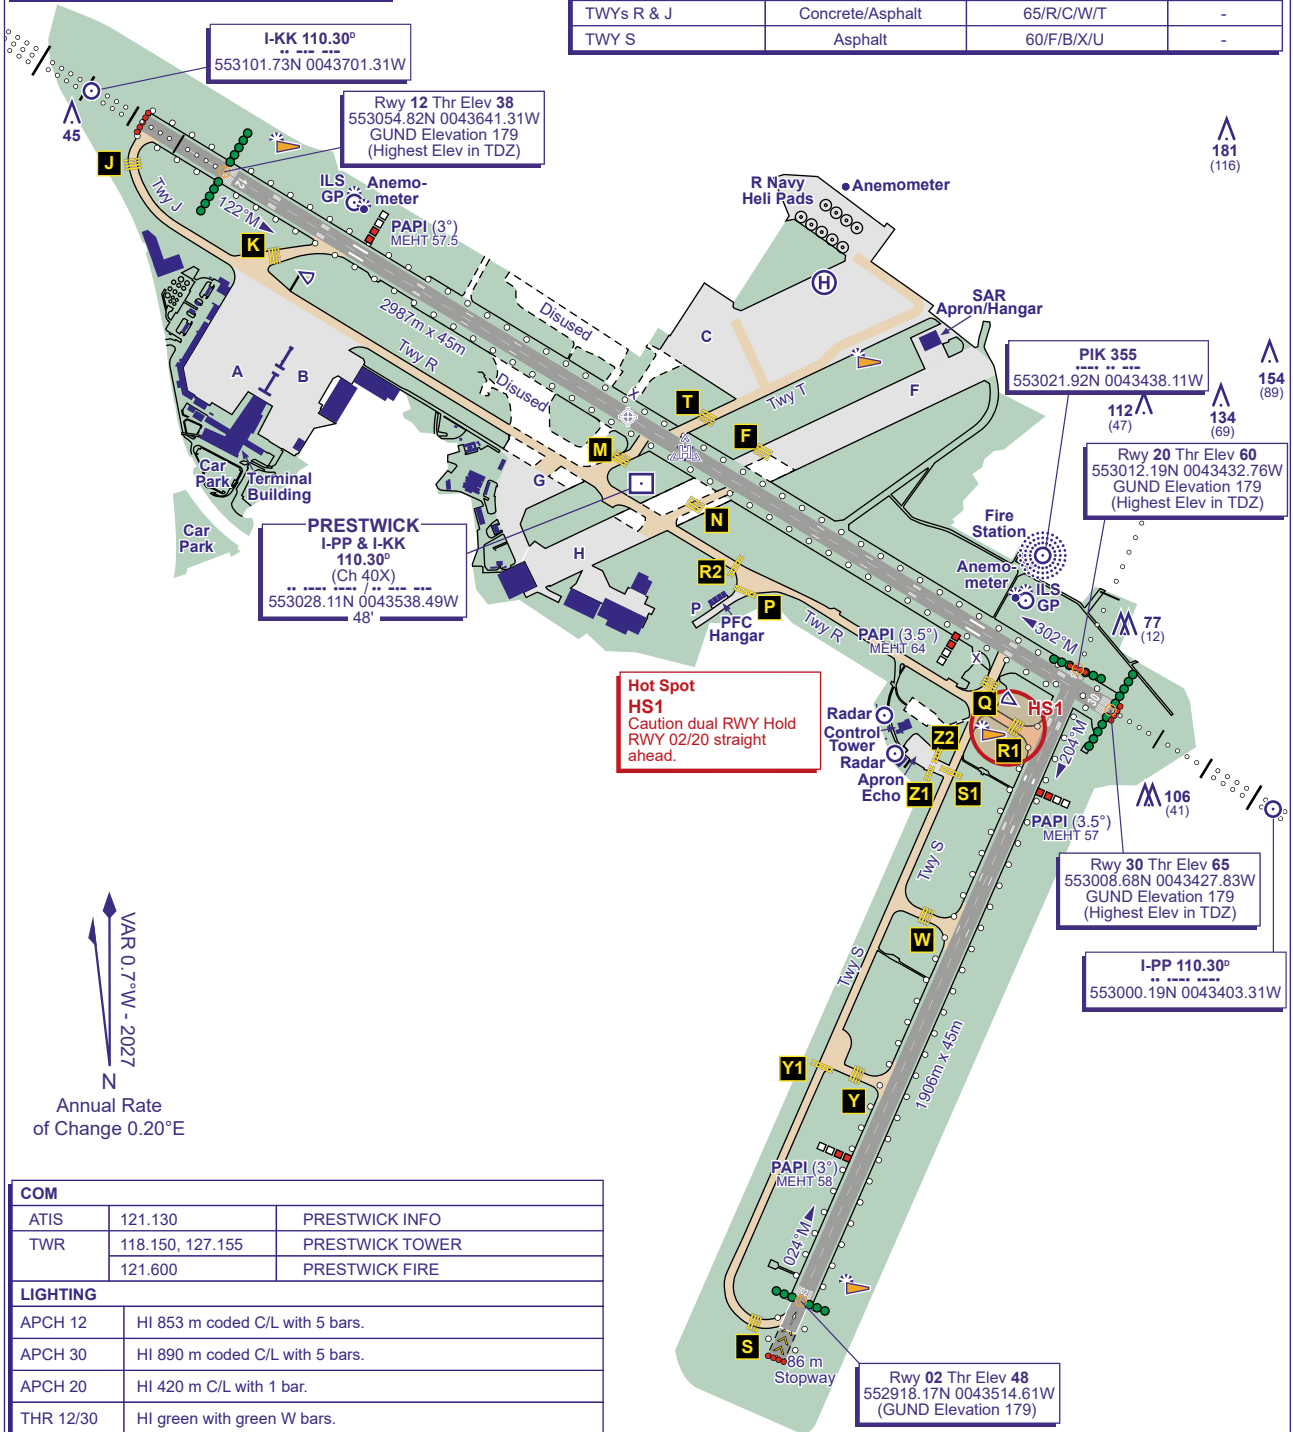

COM		
ATIS	121.130	PRESTWICK INFO
TWR	118.150, 127.155	PRESTWICK TOWER
	121.600	PRESTWICK FIRE
LIGHTING		
APCH 12	HI 853 m coded C/L with 5 bars.	
APCH 30	HI 890 m coded C/L with 5 bars.	
APCH 20	HI 420 m C/L with 1 bar.	
THR 12/30	HI green with green W bars.	
THR 02/20	HI green with green W bars.	
RWY 12/30	HI elev bi-d with LI omni-d component. HI colour coded C/L End lights red.	
RWY 02/20	HI bi-d. LI omni-d component. End lights red.	
TWY	Green C/L. Blue edge. Guard Lights at J, K, Q, R1, S, W & Y.	