



GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL HEIGHTS IN FEET ABOVE AD	673 (146)

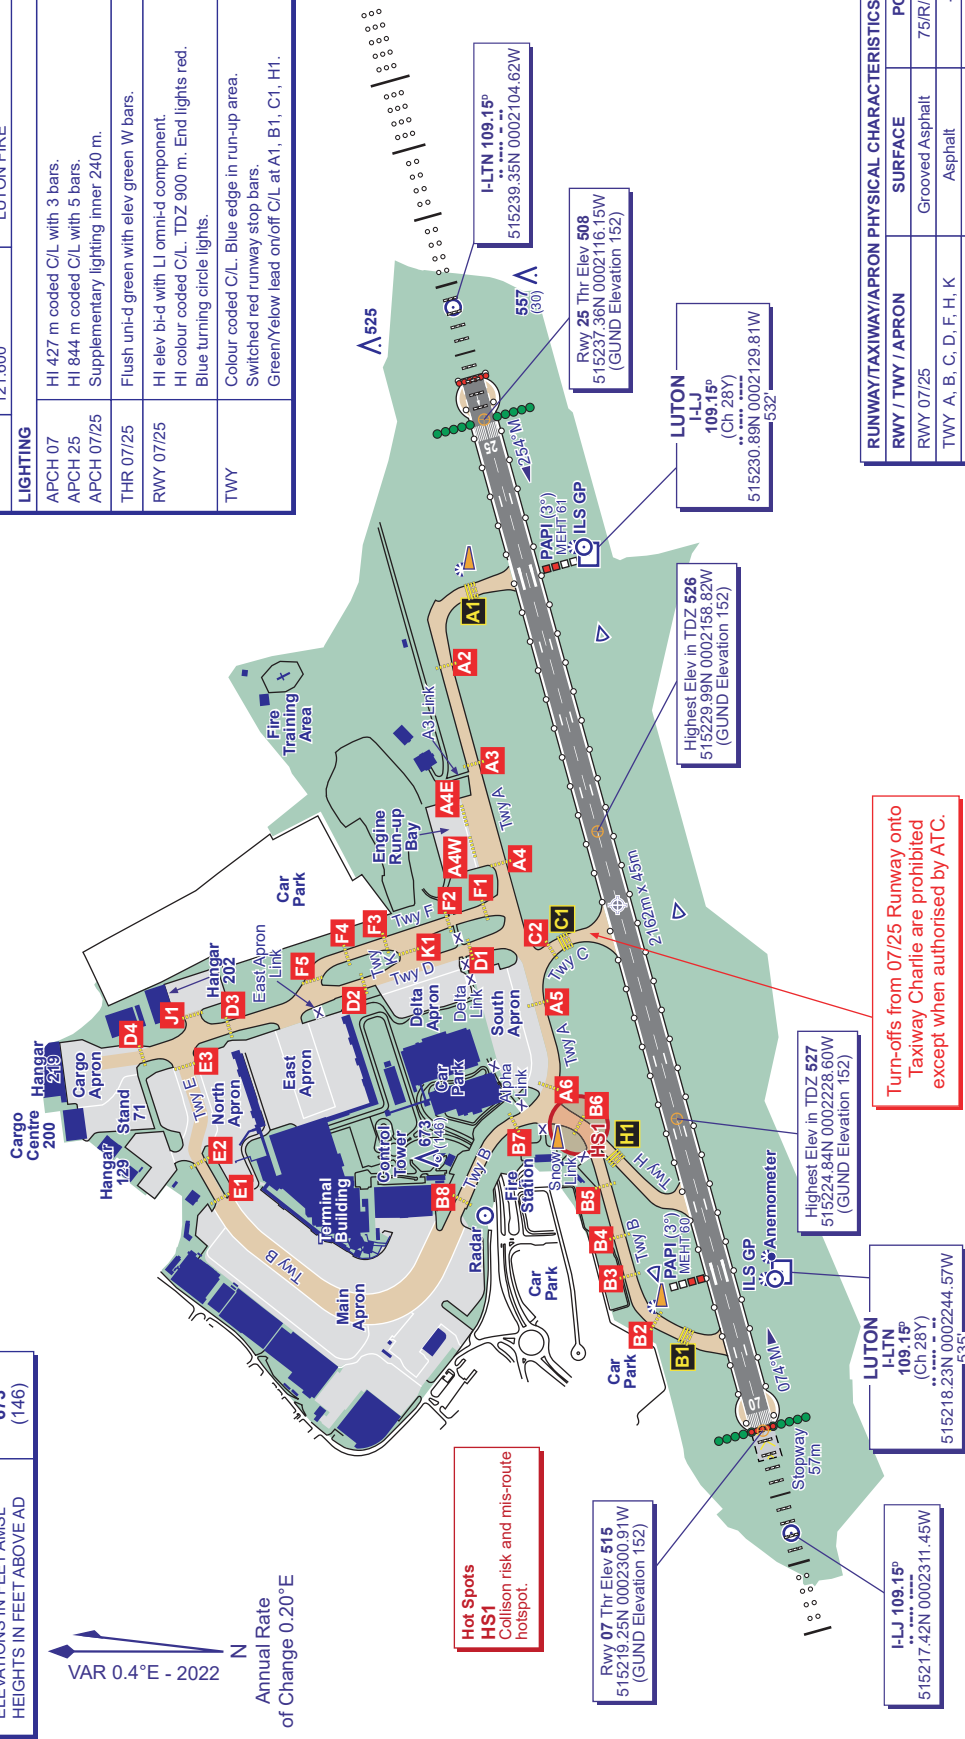

Annual Rate
of Change 0.20° E



COM	ATIS	120.580	LUTON INFO
	TWR	132.555	LUTON TOWER
		121.755 (GMC)	LUTON GROUND
		121.885	LUTON DELIVERY
LIGHTING		121.600	LUTON FIRE
	APCH 07	HI 427 m coded C/L with 3 bars.	
	APCH 25	HI 844 m coded C/L with 5 bars. Supplementary lighting inner 240 m.	
	APCH 07/25	Flush uni-d green with elev green W bars.	
	THR 07/25	HI elev bi-d with LI omni-d component. HI colour coded C/L. TDZ 900 m. End lights red. Blue turning circle lights.	
TWY		Colour coded C/L. Blue edge in run-up area. Switched red runway stop bars. Green/Yellow lead on/off C/L at A1, B1, C1, H1.	

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
RWY / TWY / APRON	SURFACE	PCN
RWY 07/25	Grooved Asphalt	75/R/D/X/T
TWY A, B, C, D, F, H, K	Asphalt	-
TWY E	Concrete	-
Aprons (All)		See AD 2-EGGW-2-2