COM		
A/G	120.710	FENTON RADIO
LIGHTING		
APCH 06	300m HI coded C/L with 2 bars.	
APCH 24	900m HI coded C/L with 5 bars.	
THR 06/24	HI green bi-d with W bars.	
RWY 06/24	Elev HI bi-d with LI omni-d component. End lights red.	

100 0 100 200 300 400 500m
500 0 500 1000 1500ft

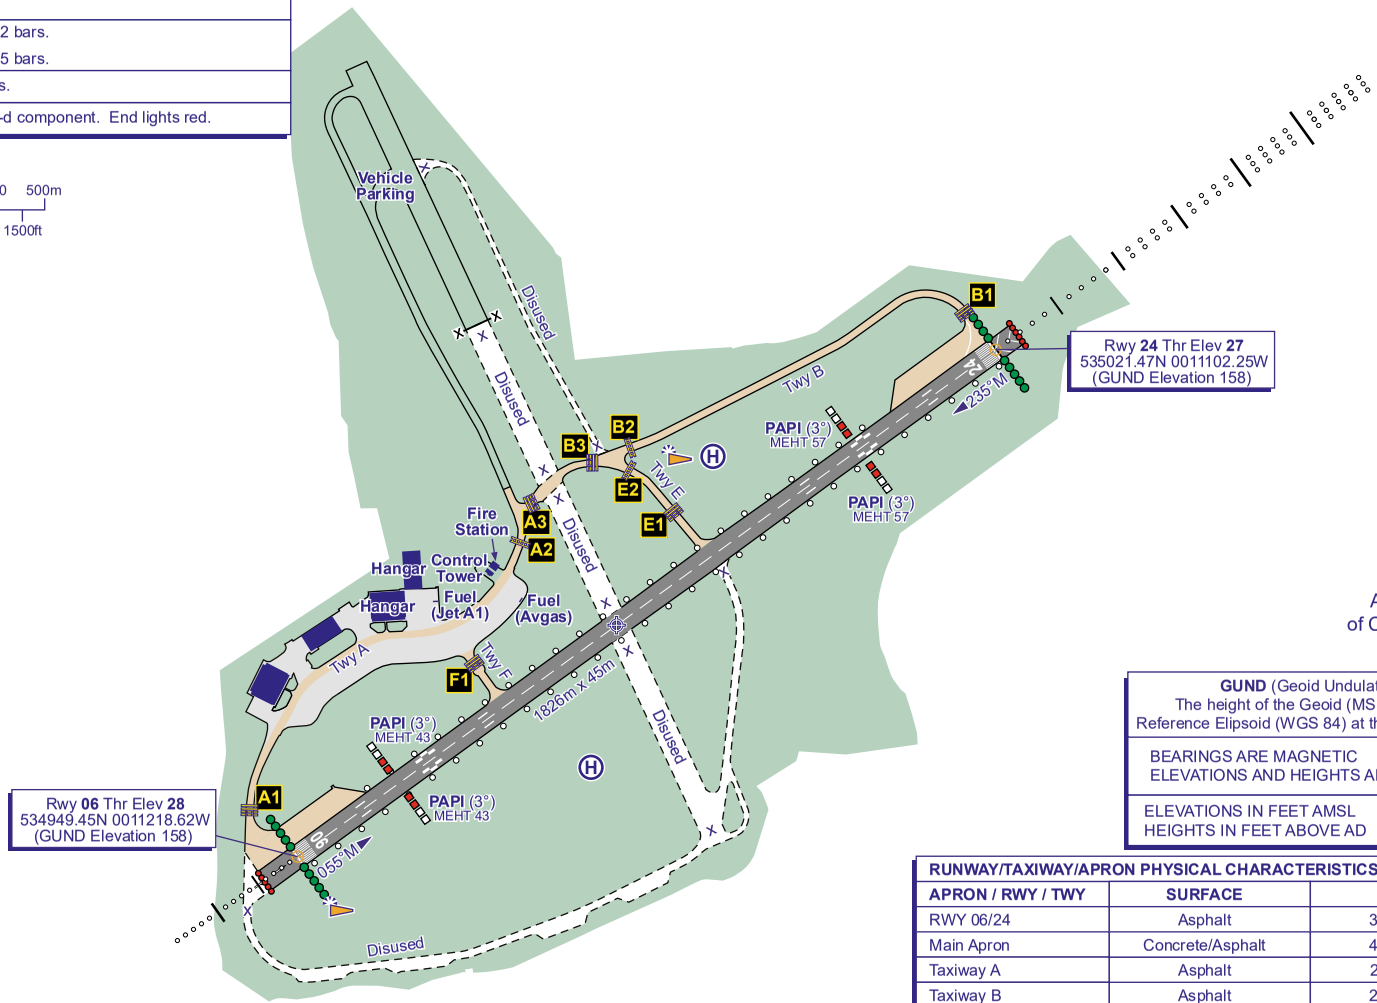

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Elipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL HEIGHTS IN FEET ABOVE AD	**29** (0)

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	**SURFACE**	**PCN**
RWY 06/24	Asphalt	30/F/C/X/U
Main Apron	Concrete/Asphalt	45/F/C/X/U
Taxiway A	Asphalt	26/F/B/X/U
Taxiway B	Asphalt	20/F/C/X/U
Taxiway E	Asphalt	20/F/C/Z/U
Taxiway F	Asphalt	8/F/C/X/U

CHANGE (13/25): BUILDINGS REVISED. FUEL STORAGE ADDED. EDITORIAL.