AERO INFO DATE 13 NOV 24

| RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS | | | | |
|---|---|---|---|---|
| APRON / RWY / TWY | SURFACE | PCN | PCR | ELEVATION |
| RWY 06/24 | Asphalt/Concrete | - | 448/F/C/W/U | - |
| TWY A | Asphalt/Concrete | - | 448/F/C/W/U | - |
| TWY B, D, E, F | Asphalt | - | 507/F/D/W/U | - |
| TWY C (North of 06/24) | Asphalt | - | 507/F/D/W/U | - |
| TWY J | Concrete | - | 524/R/B/X/U | - |
| TWY W | Asphalt | - | 132/F/D/W/U | - |
| TWY Y, Z | Asphalt | - | 326/F/D/W/U | - |
| Aprons | *See AD 2-EGLF-2-2* | | | |

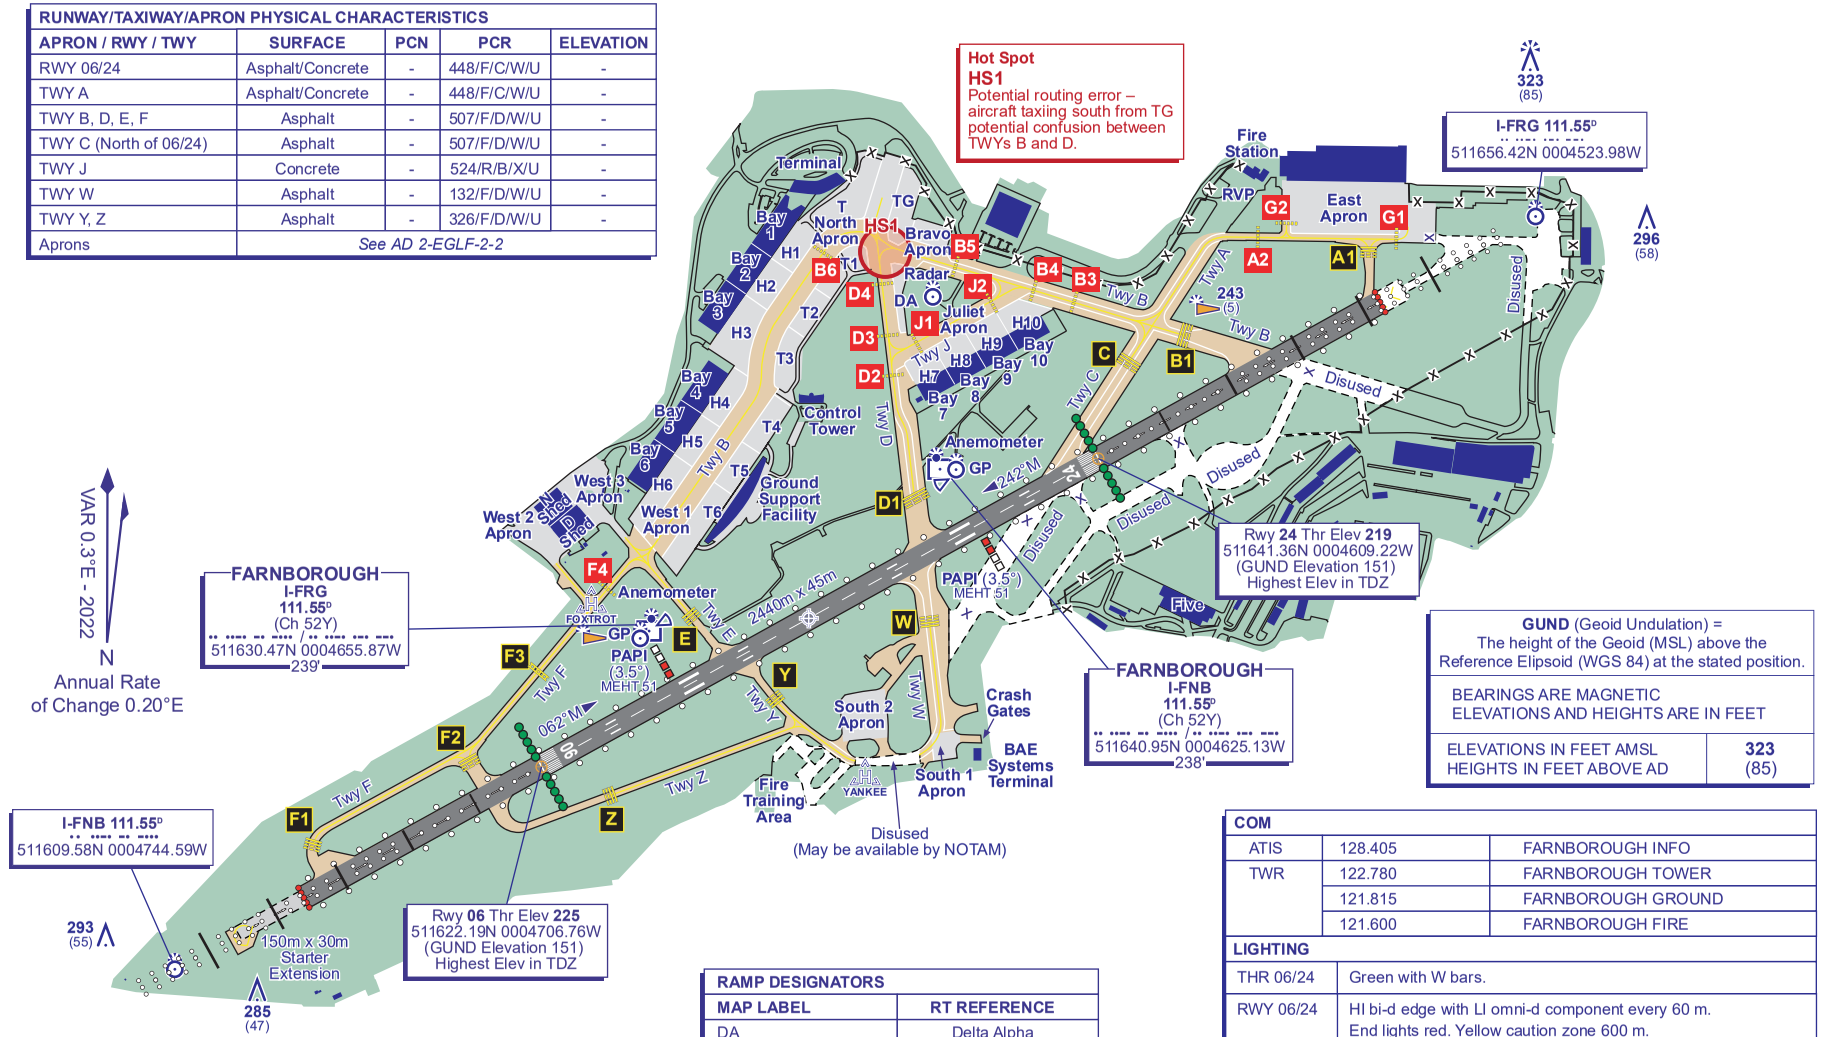


**GUND** (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Elipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

| | |
|---|---|
| ELEVATIONS IN FEET AMSL | 323 |
| HEIGHTS IN FEET ABOVE AD | (85) |

| RAMP DESIGNATORS | |
|---|---|
| MAP LABEL | RT REFERENCE |
| DA | Delta Alpha |
| H1-H10 | Hangar (1-10) Ramp |
| T | Terminal Ramp |
| TG | Terminal Grass Ramp |
| T1-T6 | Tower (1-6) Ramp |

| COM | | |
|---|---|---|
| ATIS | 128.405 | FARNBOROUGH INFO |
| TWR | 122.780 | FARNBOROUGH TOWER |
| | 121.815 | FARNBOROUGH GROUND |
| | 121.600 | FARNBOROUGH FIRE |

| LIGHTING | |
|---|---|
| THR 06/24 | Green with W bars. |
| RWY 06/24 | HI bi-d edge with LI omni-d component every 60 m. End lights red. Yellow caution zone 600 m. |
| TWY | Green C/L on TWY A, B, D, J, West 1 & North Apron, blue edge on remaining TWYs, including TWY B (between B3 & B4). Green/Yellow C/L in ILS sensitive areas A1, B1, F3, W & Y. Stop bars and runway guard lights at all holding points. |

**CHANGE (1/25):** BUILDINGS REVISED. OBSTACLES REVISED. TAXI GUIDELINES REVISED. HOLDS A2, B4, B6, D2, D3, D4, J1, J2 REVISED.