


INSTRUMENT APPROACH CHART - ICAO

NEWQUAY
SRA RTR 2NM
RWY 30
(ACFT CAT A,B,C,D)



MSA 25NM NDB(L) NQY


APP	133.405	NEWQUAY APPROACH	AD ELEVATION	390
TWR	134.380	NEWQUAY TOWER	THR ELEVATION	385
RAD	127.930	NEWQUAY RADAR	OBSTACLE ELEVATION	1286 AMSL (901) (ABOVE THR)
ATIS	127.405	NEWQUAY INFORMATION	BEARINGS ARE MAGNETIC	

TRANSITION ALTITUDE	3000
---------------------	------



RECOMMENDED PROFILE Gradient 5.24%, 318FT/NM

NM (Radar Ranges)	6	5	4 (SDF)	3	2
ALT(HGT)	2350(1965)	2030(1645)	1710(1325)	1390(1005)	1070(685)

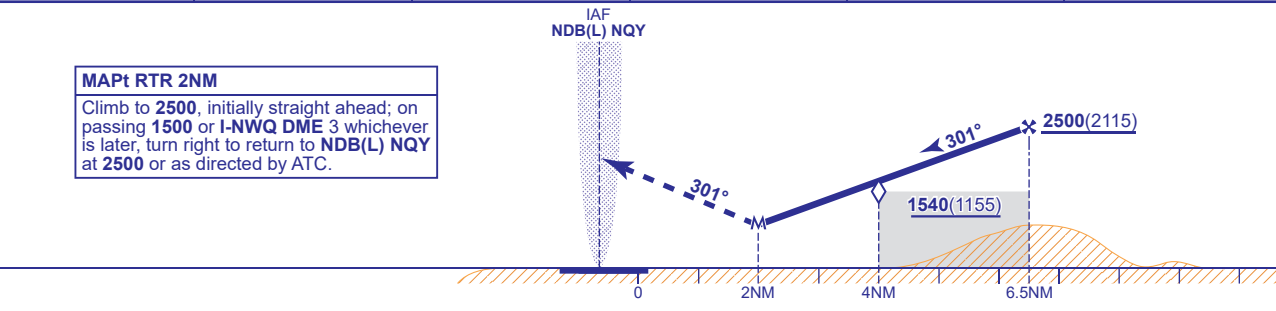

Aircraft Category	A	B	C	D	Rate of descent	G/S KT	160	140	120	100	80
OCA (OCH)	Procedure	1070(685)	1070(685)	1070(685)	1070(685)	FT/MIN	850	740	640	530	420
VM(C)OCA (OCH AAL)	Total Area	1070(680)	1200(810)	1330(940)	1330(940)						

- NOTE 1 ATC will normally require aircraft to hold no lower than 3500.
2 Radar Ranges are to the threshold of RWY 30.